




Put proprietary serial devices on a BACnet IP network

Control Solutions' Babel Buster BB3-7101-SP is a BACnet IP client/server device that functions as a Modbus RTU master/slave and/or Modbus TCP client/server. A large number of BACnet objects gives you flexibility in mapping Modbus registers to any combination of BACnet objects. Packed Modbus registers may be parsed to multiple BACnet objects when reading. Multiple BACnet objects may be packed into a single Modbus register when writing. All standard Modbus register types are supported.

Input objects will poll their assigned Modbus register at the interval you specify, and provide the Modbus data as the Present Value when read. Commandable Output objects are used to write Modbus registers, and will update the Modbus device each time BACnet is updated.

The BB3-7101-SP is a special version of the BB3-7101 that allows one to repurpose the serial communication port to be used for a proprietary serial protocol instead of Modbus RTU. When used for interpreting a proprietary protocol, a Script Basic program would be written to send and receive via the serial port as applicable, and interact with the local BACnet objects under user program control.

The BB3-7101-SP allows you to BACnet enable enable serial devices that otherwise have no network connection. Combined with rule templates, Script Basic can generate BACnet COV notifications. Script Basic also has access to TCP and UDP connections, and can potentially interpret proprietary IP protocols as well.

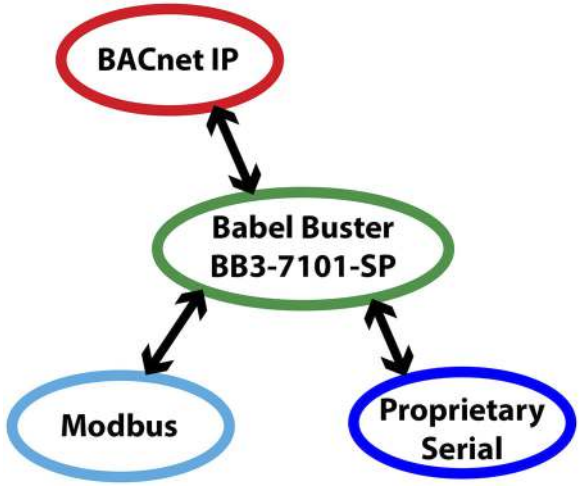


Babel Buster BB3-7101-SP Object Summary

- Analog Input, Analog Output, Analog Value
- Binary Input, Binary Output, Binary Value
- Multi-State Input, Output, Value
- Typically at least 1,000 Objects
- Objects from pool can be assigned to any of above types
- Maximum of 1024 states for multi-state, includes state text (actual value supported varies by resource usage per object)



Built-In Secure Web Server for Configuration and Programming

Read/Write just about anything
as a BACnet Property Value,
or vice versa!

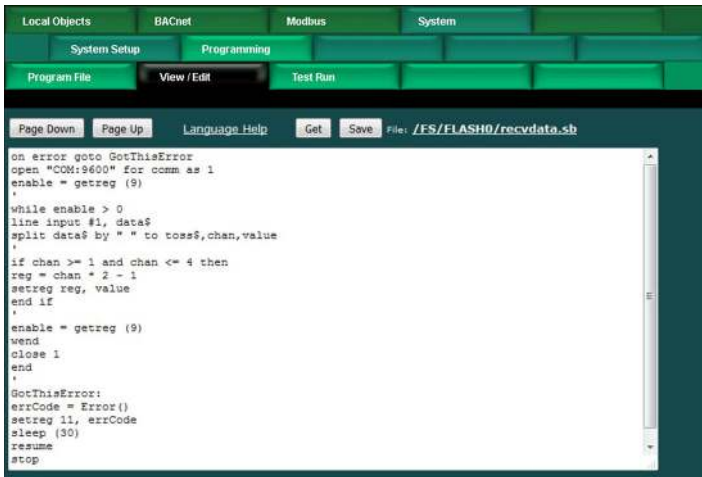

FEATURES

- Script Basic programming for custom serial protocols
- Read/Write any standard Modbus register via BACnet objects
 - Up to 5,000 objects
 - Analog, Binary, Multi-State object types
 - Input, Output, Value objects
- BACnet slave is Modbus RTU master or vice versa
- BB3-7101 is also Modbus TCP client/server
- Bidirectional data exchange between BACnet and Modbus
- Direct import of CSV files for faster point mapping
- Supports Modbus “coils”, input registers, holding registers
- Single or double Modbus registers, signed, unsigned, IEEE 754
- Modbus register mapping configured via secure web interface
- Modbus registers may be scaled (x10, x100, x0.1, x0.01, etc.)
- Modbus (master) polling interval configurable per point
- Commandable BACnet objects implement priority array
- Hardened EIA-485 transceiver for Modbus RTU
- 10/100BaseT Ethernet for BACnet IP and Modbus TCP
- Powered by 10-30VDC or 24VAC 50/60 Hz
- Power Consumption: 0.1A @ 24VDC
- DIN rail mounting, 100mm H x 70mm W x 60mm D
- Pluggable screw terminal block for power & RTU network
- Operating temperature -40°C to +85°C
- Humidity 5% to 90% non-condensing
- FCC Class A, CE Mark
- Listed to UL 916 and (Canadian) C22.2 No. 205-M1983

Script Basic can program your BB3-7101-SP to be a passive listener capturing data from something like a data logger. Script Basic can also program your BB3-7101-SP to be an active polling device to query your serial device and interpret the response to provide data to BACnet (or Modbus TCP).

Configuration of the BB3-7101-SP gateway is done via the web pages served by the internal web server. You simply fill in templates. The entire configuration is saved in the internal Flash file system in XML format. This file may be exported to replicate additional copies of the configured device, or for backup.

BACnet Protocol Implementation Conformance Statement (Abbreviated)

Date: 28 June 2021
 Vendor Name: Control Solutions, Inc.
 Product Name: Babel Buster BB3-7101-SP
 Product Model Number: BB3-7101-SP
 Applications Software Version: 3.15
 Firmware Revision: 3.15
 BACnet Protocol Revision: 15

Product Description: Network gateway allowing Modbus RTU and TCP devices to be accessed via BACnet IP and vice versa.

BACnet Standardized Device Profile (Annex L):
 ► BACnet Application Specific Controller (B-ASC)
 ► BACnet Gateway (B-GW)

List all BACnet Interoperability Building Blocks Supported (Annex K):
 DS-RP-B, DS-RPM-B, DS-WP-B, DS-COV-B, DS-COVP-B,
 DM-DDB-B, DM-DOB-B, DM-RD-B, GW-EO-B

Segmentation Capability: Request & response, window size 8

Standard Object Types Supported:
 Object types: AI, AO, AV, BI, BO, BV, MSI, MSO, MSV, DEV (all static)
 See additional documentation for optional & proprietary properties.

Visit our web site for

- Full details
- User Guides & Software Downloads
- Pricing
- On-Line Ordering

www.csimn.com



CONTROL SOLUTIONS MINNESOTA

PO BOX 10789

ST. PAUL, MN 55110-0789

VOICE (651) 426-4410 • FAX (651) 426-4418

TOLL FREE 1-800-872-8613

© 2021 Control Solutions, Inc. Babel Buster® is a registered trademark of Control Solutions, Inc. BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to requirements of ASHRAE Standard 135 is the responsibility of BACnet International. BTL is a registered trademark of BACnet International.