


BACnet IP to MS/TP Router plus SNMP v3 Gateway

Control Solutions' Babel Buster BB3-7302-V3 is a BACnet router, slave proxy, and client/server gateway that allows remapping objects from multiple slaves into one master. You can use the BB3-7302-V3 as just a router, just a slave proxy, just a client/server, or all three at the same time. The BB3-7302-V3 also includes BBMD support. The BB3-7302-V3 is a performance upgrade of Control Solutions' original BB2-7030 BACnet router.

The BB3-7302-V3 as a BACnet Router will route IP to MS/TP and vice versa via its local ports, and supports full router capability for multi-hop internetworks including via NAT WAN routers. Routing is simple to set up. Routing can be used without any other gateway features enabled.

The BB3-7302-V3 as a BACnet Client/Server Gateway will poll BACnet IP and/or BACnet MS/TP slaves or servers, and retain copies of selected object properties. Upstream clients may then query the BB3-7302-V3 to receive data originating from multiple devices.

The BB3-7302-V3 is an SNMP Agent. Local BACnet objects can be assigned to either of the branches of the local MIB for remote access by SNMP Managers. The local data may be accessed as scaled integer or 32-bit floating point (RFC 6340). An SNMP Get to the BB3-7302-V3 will read local objects and an SNMP Set will write the local objects. If local objects are mapped via the BACnet client to write to other BACnet devices, then SNMP Set will result in writing to a BACnet device. The BB3-7302-V3 can also send traps or notifications based on threshold rules created via templates in the BB3-7302-V3's web UI.

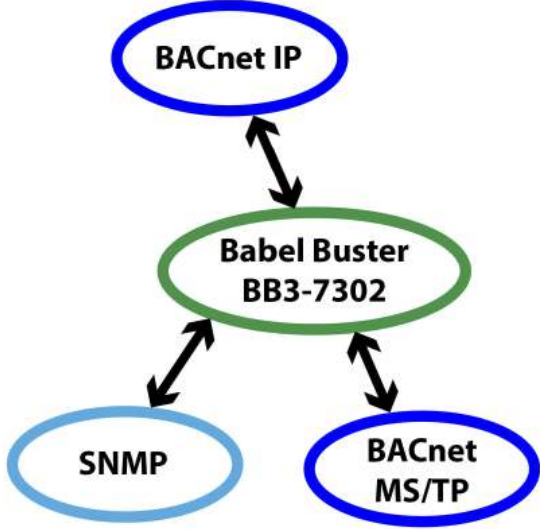

Babel Buster BB3-7302 Object Summary

- Analog Input, Analog Output, Analog Value
- Binary Input, Binary Output, Binary Value
- Multi-State Input, Output, Value

- Up to 1,000 MIB Variables

- Objects from pool can be assigned to any of above types
- Maximum of 1024 states for multi-state, includes state text (actual value supported varies by resource usage per object)

Babel Buster[®] 3

BACNET
ROUTER & GATEWAY
MODEL BB3-7302-V3



CONTROL SOLUTIONS MINNESOTA

Built-In Secure Web Server for Configuration and Diagnostics



BACnet Protocol Implementation Conformance Statement (Abbreviated)

Date: 29 September 2021

Vendor Name: Control Solutions, Inc.

Product Name: Babel Buster Product Model Number: BB3-7302-V3

Applications Software Version: 3.16.6 Firmware Revision: 3.16.6

Product Description: BACnet IP to MS/TP Router with SNMPv3 Gateway

BACnet Standardized Device Profile (Annex L):

- ▶ BACnet Application Specific Controller (B-ASC)
- ▶ BACnet Gateway (B-GW)
- ▶ BACnet Router (B-RTR)

List all BACnet Interoperability Building Blocks Supported (Annex K):

DS-RP-A, DS-RP-B, DS-RPM-B, DS-WP-A, DS-WP-B, DS-WPM-B, DS-COV-B,
DS-COVU-B, DM-DDB-A, DM-DDB-B, DM-DOB-B, DM-DCC-B, DM-RD-B,
DM-R-B, GW-EO-B, DM-SP-B, NM-RC-B, NM-BBMD-C-B, NM-FDR-A

Segmentation Capability: Request & response, window size 8

Standard Object Types Supported:

Object types: AI, AO, AV, BI, BO, BV, MSI, MSO, MSV, DEV (all static)

See additional documentation for optional & proprietary properties.

Data Link Layer Options:

- ▶ BACnet IP (Annex J)
- ▶ BACnet MS/TP master & slave (9600, 19200, 38400, 76800 baud)

Device Address Binding:

Is static device binding supported? Yes

Networking Options: ▶ Router, Clause 6, BACnet IP-MS/TP

- ▶ Annex H.1, Mapping Non-BACnet Networks onto BACnet Routers
- ▶ BACnet IP Broadcast Management Device (BBMD)
(Support registrations by Foreign Device: Yes)

Character Sets Supported: ANSI X3.4

If this product is a communication gateway, describe the types of non-BACnet equipment/networks(s) that the gateway supports:
SNMP

FEATURES

- BACnet IP to MS/TP Router
- Slave proxy to support MS/TP slave-only devices
- Client/Server gateway for remapping BACnet objects
- Read/Write any standard BACnet objects as a Gateway
 - Up to 5,000 objects
 - Analog, Binary, Multi-State object types
 - Input, Output, Value objects
- BBMD, COV support
- SNMP v1, v2c, v3 Get/Set access to all data points
- SNMP v1, v2c, v3 trap generation, user programmable criteria
- MD5/DES support for Get/Set, encrypted traps not supported
- Up to 1,000 MIB variables
- Direct import of CSV files for faster point mapping
- Commandable BACnet objects implement priority array
- Hardened EIA-485 transceiver for BACnet MS/TP
- 10/100BaseT Ethernet for BACnet IP and SNMP
- Includes "10X" file capacity
- Powered by 10-30VDC or 24VAC 50/60 Hz
- Power Consumption: 0.1A @ 24VDC
- DIN rail mounting, 100mm H x 70mm W x 60mm D
- Pluggable screw terminal block for power & RTU network
- Operating temperature -40°C to +85°C
- Humidity 5% to 90% non-condensing
- FCC Class A, CE Mark
- Listed to UL 916 and (Canadian) C22.2 No. 205-M1983

Visit our web site for

- Full details
- User Guides & Software Downloads
- Pricing
- On-Line Ordering

www.csimmn.com



CONTROL SOLUTIONS MINNESOTA

PO BOX 10789

ST. PAUL, MN 55110-0789

VOICE (651) 426-4410 • FAX (651) 426-4418

TOLL FREE 1-800-872-8613

© 2021 Control Solutions, Inc. Babel Buster[®] is a registered trademark of Control Solutions, Inc. BACnet[®] is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.